


AMPLIROLL® URBAN AL3PA

TELESCOPIC AND ARTICULATED JIB
LIFTING CAPACITY 3T

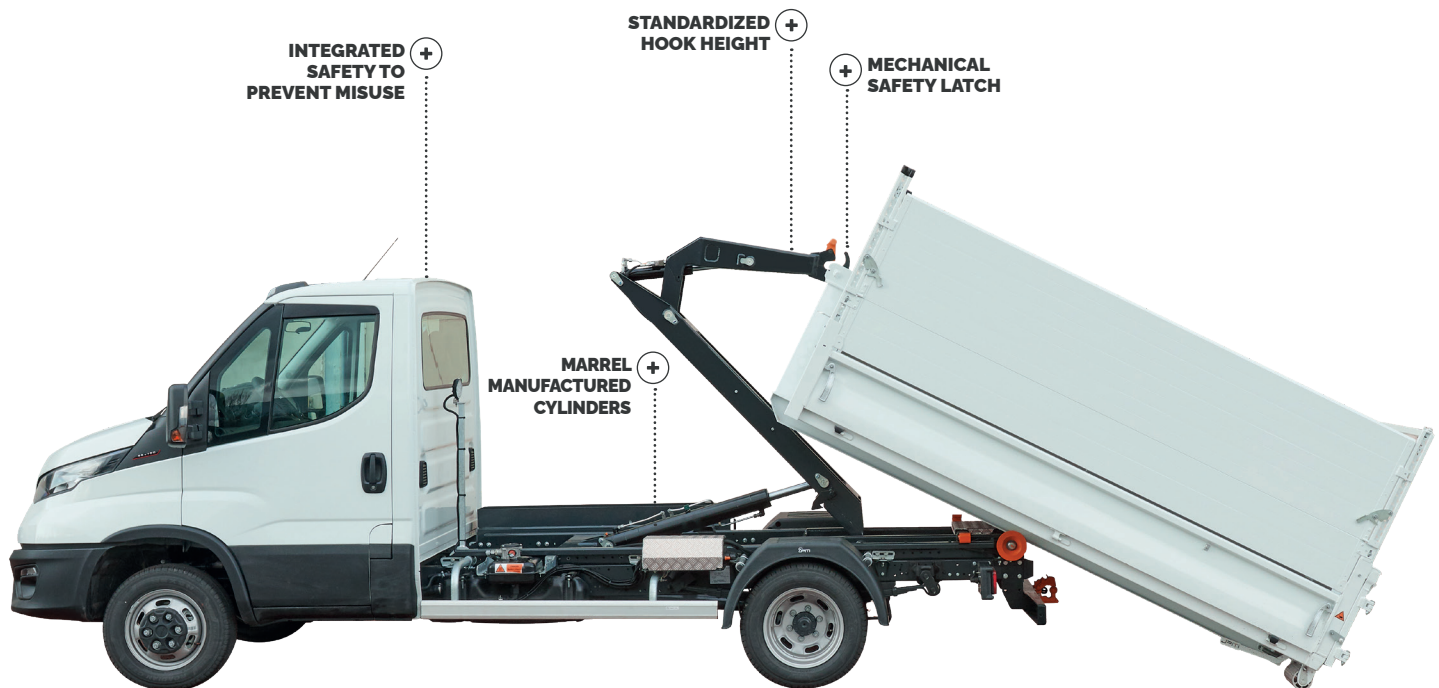

KEY POINTS

PRODUCTIVITY

Reduced loading angle and greater range of container lengths

EFFICIENCY

Unmatched **lifting capacity-to-payload ratio**

CONVENIENCE

Suitable for urban areas thanks to its **sleek design** and **reduced weight**

ADAPTABILITY

Dual-track option 1060/850 mm, allowing the handling of containers with two widths on the same equipment



OPTIONS AND ACCESSORIES

- 1

Electro pump group version
- 2

Attachments brackets suited for various truck models
- 3

850-1060 mm Track width
- 4

12V and 24V versions
- 5

Extendable rear underrun protection

Non-exhaustive list - many other options are available to customize your equipment

TECHNICAL DATA

For GVW up to 5.5 T		A26	A28	A30	A33
Inside length of the bodies (mm)		2 800	3 000	3 200	3 500
Tipping angle (°)		50	50	50	50
Loading angle * (°)		30	30	30	30
Equipment net weight (Kg)		370	380	380	420

Subject to technical changes, non-contractual data
* Chassis height 800 mm